



Schottky Barrier Rectifiers

Reverse Voltage 20 to 40V
Forward Current 1.0A



Glass MELF

Cathode Mark

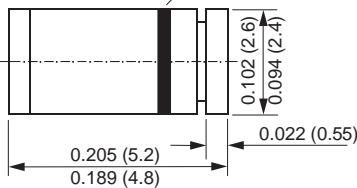


Use "M" Suffix if body is MELF

Dimensions in inches and (millimeters)

*2.6 mm max. for glass DO-41

**4.1 mm max. for glass DO-41

DO-204AL (DO-41)

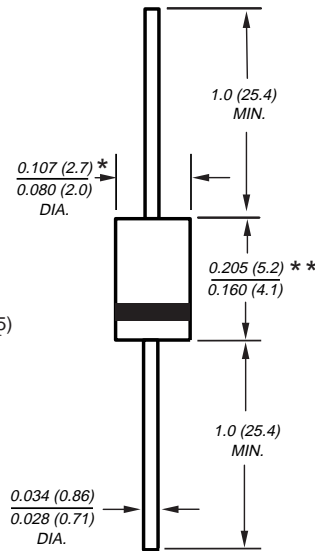

Use "G" suffix
if glass body DO-41

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Low power loss, high efficiency
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- Guardring for overvoltage protection

Mechanical Data

Case: JEDEC DO-204 AL molded plastic body, glass body or glass MELF body

Terminals: Plated leads, solderable per MIL-STD-750, Method 2026

High temperature soldering guaranteed: 250°C/10 seconds at terminals for MELF and 0.375" (9.5mm) lead length, 5lbs (2.3kg) tension for axials

Polarity: Color band denotes cathode end (band is green on MELF)

Weight: plastic body DO-41: 0.34g
glass body DO-41: 0.35g
glass MELF: 0.25g

Maximum Ratings and Thermal Characteristics (T_A = 25°C unless otherwise noted)

Parameter	Symbol	1N5817	1N5818	1N5819	Unit
* Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	V
Maximum RMS voltage	V _{RMS}	14	21	28	V
* Maximum DC blocking voltage	V _{DC}	20	30	40	V
* Maximum non-repetitive peak reverse voltage	V _{RSM}	24	36	48	V
* Maximum average forward rectified current 0.375" (9.5mm) lead length at T _L =90°C	I _{F(AV)}	1.0			A
* Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) at T _L =70°C	I _{FSM}	25			A
Typical thermal resistance – junction-to-ambient (glass) (Note 2)	R _{θJA}	130			°C/W
– junction-to-ambient (plastic)	R _{θJA}	50			
– junction-to-lead (plastic)	R _{θJL}	15			
*Storage temperature range	T _J , T _{STG}	–65 to +125			°C

Electrical Characteristics (T_A = 25°C unless otherwise noted)

Parameter	Symbol	1N5817	1N5818	1N5819	Unit
* Maximum instantaneous forward voltage at 1.0 (Note 1)	V _F	0.450	0.550	0.600	V
* Maximum instantaneous forward voltage at 3.1 (Note 1)	V _F	0.750	0.875	0.900	V
* Maximum average reverse current at rated DC blocking voltage (Note 1)	I _R	1.0 10			mA
Typical junction capacitance at 4.0V, 1.0MHz	C _J	110			pF

* JEDEC registered values

Notes: (1) Pulse test: 300µs pulse width, 1% duty cycle

(2) Thermal resistance from junction to lead vertical P.C.B. mounted, 0.375" (9.5mm) lead length with 1.5 x 1.5" (38 x 38mm) copper pads

1N5817 thru 1N5819

Vishay Semiconductors
formerly General Semiconductor



Ratings and Characteristic Curves (T_A = 25°C unless otherwise noted)

Fig. 1 - Forward Current Derating Curve

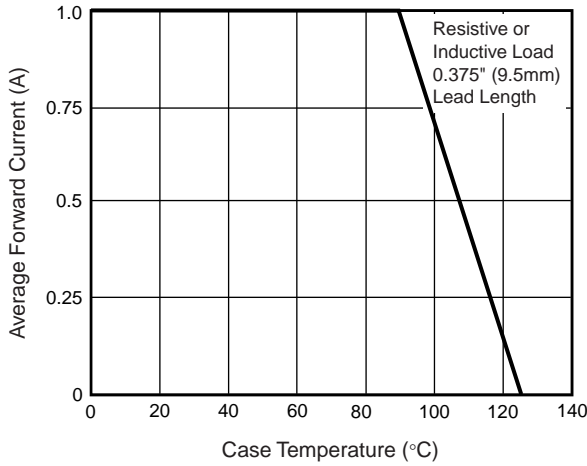


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current

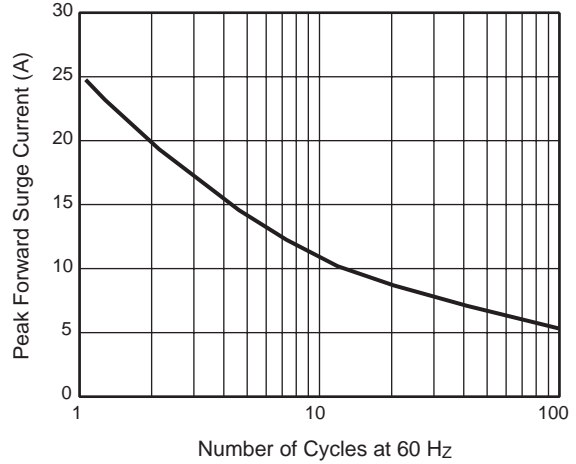


Fig. 3 - Typical Instantaneous Forward Characteristics

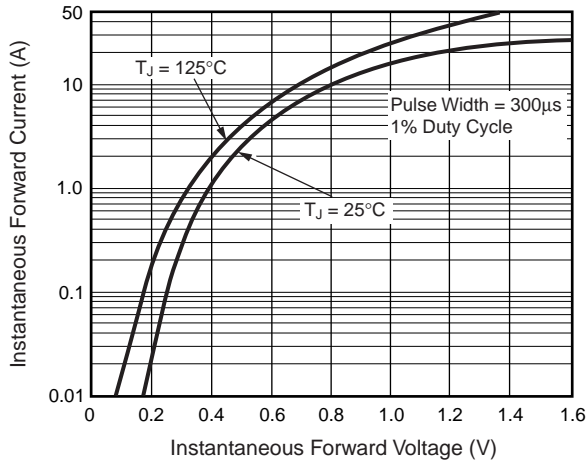


Fig. 4 - Typical Reverse Characteristics

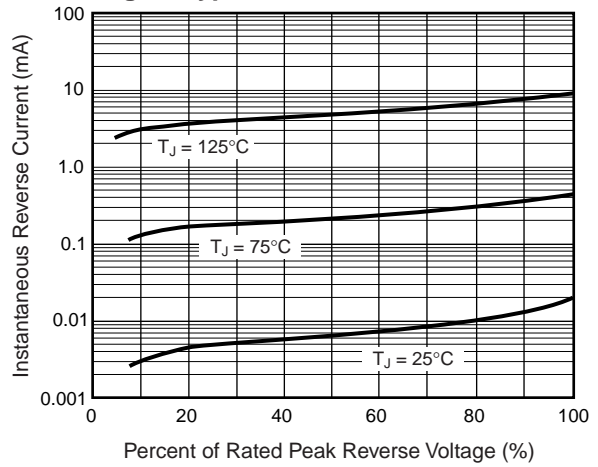


Fig. 5 - Typical Junction Capacitance


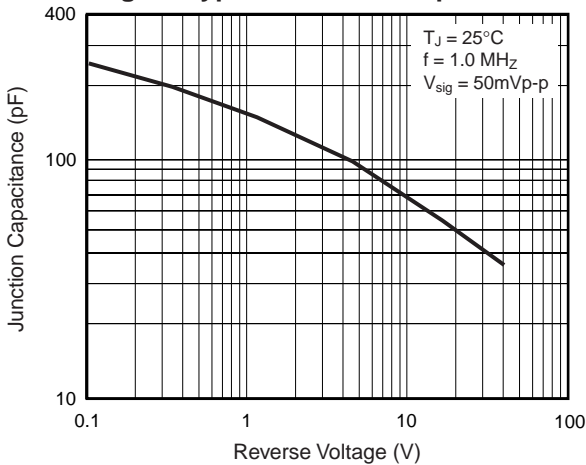


Fig. 6 - Typical Transient Thermal Impedance

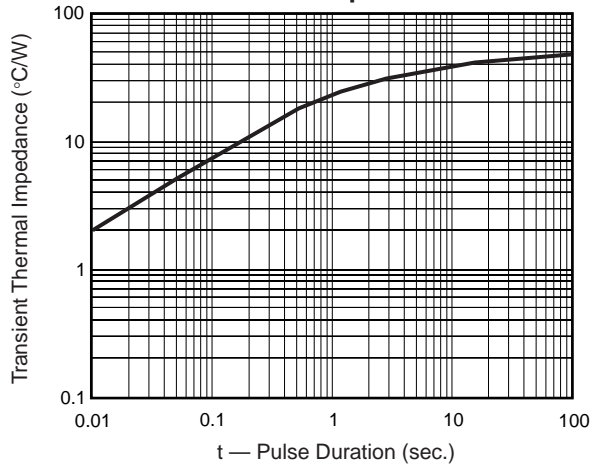

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.